

Forenta

Morristown, TN U.S.A.

Laundry Pant Toppers

Models A-ATA19VS/VSE, A-ATA3516VS

Model ATA19VS



Single Pants Topper

- Insulated Head Cover and Nickel-Plated Head Reduces Heat Loss, Saves Energy
- Designed for Finishing Pants, Shirts, Blouses and Small Wearing Apparel
- A Model Uses Control Bar Operation
- ATA Model Uses Two-Button Operation
- Available Steam or Electrically Heated
- Water Spray Standard

Model A19VS



Double Pants Topper

- Finishes Two Pants Tops at Same Time
- Works Well in Conjunction with 4224 Double Legger
- Insulated Head Cover and Nickel-Plated Head Reduces Heat Loss, Saves Energy
- A Model Uses Control Bar Operation
- ATA Model Uses Two-Button Operation
- Available Steam-Heated Only
- Water Spray Standard



Model ATA3516VS




Model A3516VS

Specifications


Models A~ATA19VS / VSE, A~ATA3516VS

Electrical connections		A19VS ATA19VS	A19VSE ATA19VSE	A3516VS ATA3516VS
Voltage: 230V 1PH 50/60Hz		—	×	—
WATTAGE		—	1600 W.	—
Approx. Consumption/Hour		—	.8 KWH	—
Steam and Air connection				
Steam Inlet	NPT	1/2"	—	1/2"
Steam Outlet	NPT	1/2"	—	1/2"
Rec. steam pressure	PSIG kPa	100-125 621-861	—	100-125 621-861
Steam consumption	BHP kg/hr	.75 11.7	—	.75 11.7
Compressed air	NPT	3/8"	3/8"	3/8"
Air consumption	free air/cycle at 68psig free air/cycle at 470kPa	0.23 CU.FT. 6.5 liters	0.23 CU.FT. 6.5 liters	0.23 CU.FT. 6.5 liters
Rec. air pressure	PSIG kPa	68 470	68 470	68 470
Water Inlet	NPT	1/4"	1/8"	1/4"
Weight (crated)				
Shipping	lbs kg	335 152	335 152	470 213
Dimensions				
B (table width)		24"(610)	24"(610)	36"(914)
C (overall width)	A-Series ATA-Series	27 ¹ / ₄ "(692) 24"(610)	27 ¹ / ₄ "(692) 24"(610)	43"(1092) 36"(914)
D	A-Series ATA-Series	13 ⁵ / ₈ "(346) 12"(305)	13 ⁵ / ₈ "(346) 12"(305)	21 ¹ / ₂ "(546) 18 ¹ / ₂ "(470)

- Control bar ~for A-Series only
- Control Push Buttons ~for ATA-Series only
- Steam connection ~for steam heated models only
- Air connection
- Steam Outlet connection ~for steam heated models only
- Electrical connection ~for electric heated models only
- Water connection ~ for machines equipped with water spray attachment

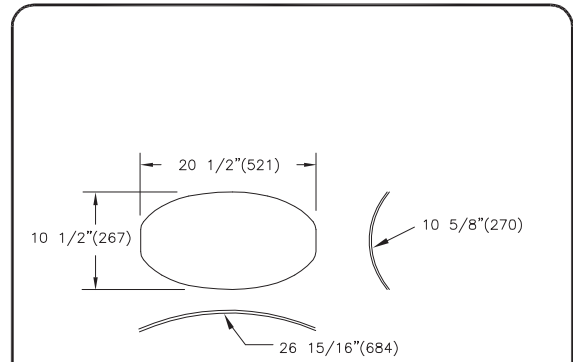

A~ATA19 Buck Dimensions

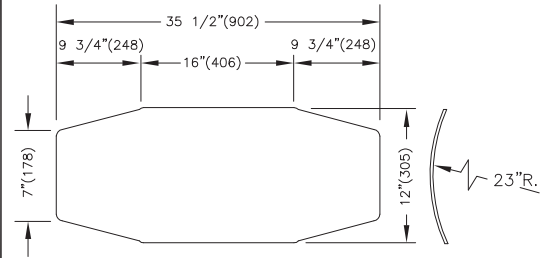

A~ATA3516 Buck Dimensions

Detail Line Drawing (millimeters shown in parentheses)

